


Energy storage battery

PowewFly 6.0 Wall-mounted / ground-mounted

5kWh/8kWh
12kWh/16kWh

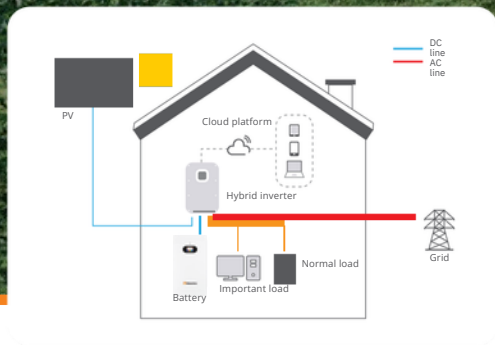

Features



Mobile Control

- Remote fault diagnosis, upgrade and maintenance
- OCV intelligent algorithm calibration ensures SOC accuracy



IP54 Dust and Water Protection

- IP54 protection rating, resist 200mm continuous heavy rain
- Dust-proof with desert-grade shield



High Performance

- Big capacity with small volume for household
- Cycle life ≥ 8000 cycles



Flexible Adaptability

- Quick and easy installation
- Modular design, expandable to 15 units in parallel

PERFORMANCE SPECIFICATIONS

| Model | HZEB-LCT-5 | HZEB-LCT-10 | HZEB-LCT-16 | HZEB-LCT-20 |
|--|--|-----------------|-----------------|-----------------|
| Battery Type | LiFePO ₄ | | | |
| Nominal Voltage | 51.2V | 51.2V | 51.2V | 51.2V |
| Configuration | 3.2V100Ah/1P16S | 3.2V206Ah/1P16S | 3.2V314Ah/1P16S | 3.2V205Ah/2P16S |
| Capacity(Ah) | 100Ah | 206Ah | 314Ah | 410Ah |
| Nominal Energy(kWh) | 5.12kWh | 10.54kWh | 16.07kWh | 20.99kWh |
| Usable Energy(kWh@90%DOD) ^[1] | 4.61kWh | 9.49kWh | 14.47kWh | 18.89kWh |
| Max.Charge/Discharge Current(A)[2] | 100A | 100A | 150A | 200A |
| Voltage Range(V) | 44.8~57.6V | | | |
| Scalability | Up to 15 units in parallel | | | |
| Communication Interface | CAN;RS232 | | | |
| Cycle Life (@25°C,90%DOD) ^[3] | ≥6000Cycles | ≥6000Cycles | ≥8000Cycles | ≥6000Cycles |
| Warranty Period ^[4] | 5+5 years | | | |
| Cumulative Discharge Energy | 8.2MWh | 16.9MWh | 25.8MWh | 33.7MWh |
| PERFORMANCE SPECIFICATIONS | | | | |
| Weight(kg) | 59kg | 83.5kg | 127kg | 180kg |
| Dimension(W*D*H) | 400*160*700mm | 460*245*640mm | 460*245*800mm | 650*265*850mm |
| Installation Method | Wall/Ground Mounted(20kWh battery ground-mounted only) | | | |
| IP Rating | IP54 | IP54 | IP54 | IP21 |
| SECURITY AND CERTIFICATION | | | | |
| Safety(Pack) | UN38.3,MSDS,IEC62619(CB),CE-EMC,IEC63056 | | | UN38.3,MSDS |
| Safety(Cell) | UN38.3,MSDS,IEC62619,CE,UL1973,UL2054 | | | |
| Protection | BMS | BMS | BMS | BMS and breaker |
| ENVIRONMENTAL SPECIFICATIONS | | | | |
| Operating Temperature Range(°C) | Charge 0°C~55°C;Discharge-20°C~55°C | | | |
| Altitude(m) | ≤2000m | | | |
| Humidity | ≤90%(Non-condensing) | | | |

[1] DC usable energy, test conditions: 25°C±2°C, 0.5C charge & discharge, 90% DOD.System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Battery cell life standard, using cells that meet the requirements of this standard.

[4] Conditions apply, refer to Dawnce Warranty Agreement.

Text and images correspond to the current state of technology at the time of printing, subject to modifications.All information is without guarantee despite of careful editing-liability excluded.